


Lavazol™ VIII

Liquid Membrane Cleaner

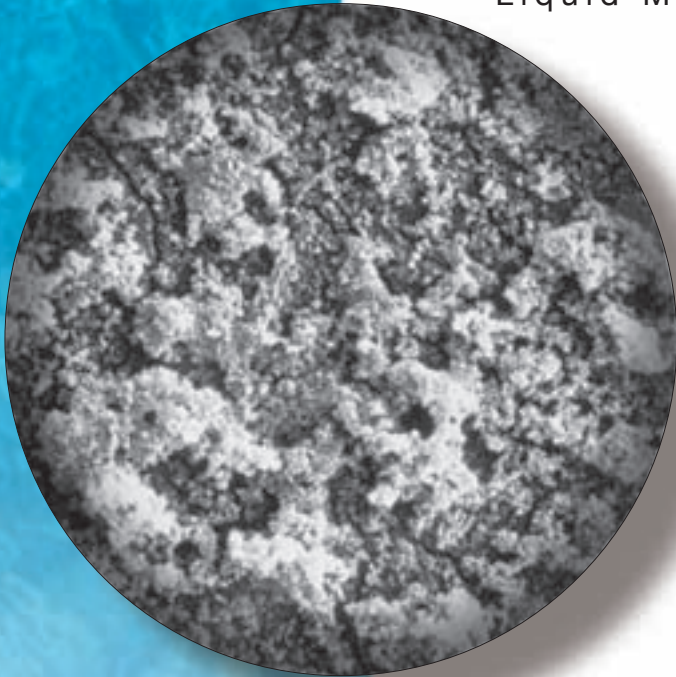

General Mixing and Application Instructions for Lavazol™ VIII*

- **Prepare system for cleaning. Fill cleaning tank with RO permeate, demineralized or softened water.**
- **Mix 1 gallon of Lavazol™ VIII for each 40 gallons of water in the cleaning tank.**
- **Recirculate solution for at least 1 hour.**
- **Static soaking heavily fouled membranes is recommended. After soaking recirculate again for a minimum of 30 minutes.**
- **Rinse systems prior to system start-up.**

Note: Due to the variability in MF/UF system configurations, consult your membrane supplier for specific cleaning instructions. This product is compatible with most chlorine tolerant MF/UF systems.

*Please contact your PWT representative for customized cleaning procedures.

Lavazol™ VIII is an alkaline-based liquid membrane cleaner developed for removing acid insoluble foulants from chlorine-tolerant MF/UF membranes.

Lavazol™ VIII dilutes quickly and easily to form a solution that vigorously removes acid-insoluble foulants that are detrimental to the performance of MF and UF membrane systems without harming the membrane surface.

A regular maintenance program including Lavazol™ membrane cleaners ensures optimum system performance and maximum membrane life.

Foulants effectively removed by Lavazol™ VIII include:

- Silt
- Colloids
- Organics
- Microbiological
- Acid insoluble
- Mucilaginous material.

pH range: 12.1 pH (after dilution)

Pack sizes: 5 gal/18.9 liter and 55 gal/208 liter



PROFESSIONAL WATER TECHNOLOGIES™

High-Performance Reverse Osmosis Chemicals

For more information, contact us today:

USA Headquarters:

1048 La Mirada Court, Vista, CA 92081 • Toll-free: 800-914-9072 • Phone: 760-639-4400
Fax: 760-639-4439 • www.pwtchemicals.com • E-mail: sales@pwtchemicals.com

México:

Puerto Progreso Interior B, Col. La Fe, San Nicolás de los Garza, N.L., México
Phone: 52-8989-6577 • Fax: 52-8989-6578 • E-mail: ventas@pwtchemicals.com

China:

Room 1101, Eton Place, No. 555 Pudong Avenue, Pudong New District, Shanghai, 200120 China

Phone: 021-68590305, 68590306, 68590307 (ext. 809) • Fax: 021-68590301 • E-mail: sells@pwt-china.com

Middle East & Africa:

Vasuchem Technologies FZC, A2-62 SAIF Zone P.O. Box 9446, Sharjah, UAE

Phone: 971-6-5570068 • Fax: 971-6-5574068 • E-mail: info@vasuchem.com

India:

Vasu Chemicals, Vasu Centre, Military Road, Marol, Mumbai 400 059, India

Phone: 9122-29209622/23 • Fax: 9122-29209624 • E-mail: info@vasuchemicals.com